


Commercial Infrastructure Line Card

Data Communications & Telecommunications

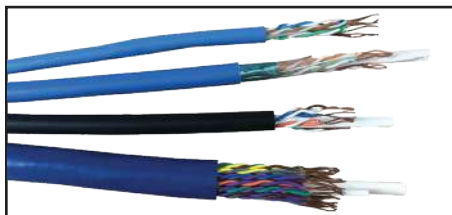

COM-Link® Category 6A*:

- Plenum & Riser
- Shielded & Unshielded Designs

COM-Link® Category 6 Unshielded*:

- Plenum & Riser
- 550 MHz


COM-Link® Category 6 Shielded*:

- Plenum & Riser
- 250 MHz

COM-Link® Category 5e*:

- 4 Pair & 25 Pair Constructions
- Plenum & Riser
- Shielded & Unshielded Designs
- 350 MHz

*Stock available in multiple jacket colors. Custom colors available upon request. (MOQ required)

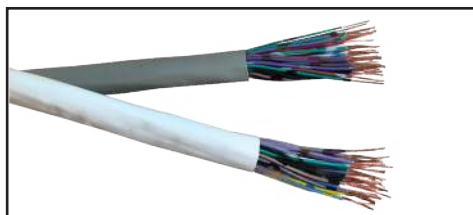

Indoor/Outdoor:

- Category 6 with waterproof gel
- LSZH jacket, UL Type CM-LS

Outside Plant:

- Category 6 & 5e with waterproof gel
- UV resistant jacket

VITALink® 2 Hour Fire Rated Ethernet:

- 2-4 Pairs, 18 AWG
- Shielded & Unshielded Designs


Category 3:

- 2-100 Pair, 24 AWG
- Plenum & Riser
- Unshielded Designs

Category 1:

- 25 & 32 Pair, 24 AWG
- Plenum & Riser
- Shielded Designs

Fire Alarm

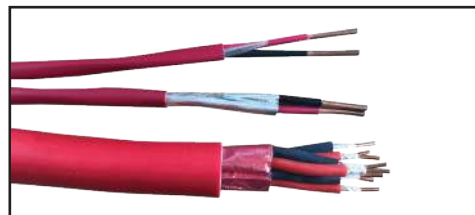

Multiconductor Fire Alarm:

- 2 & 4 Conductors
- 18-12 AWG Solid Copper
- FPLP & FPLR
- Shielded & Unshielded Designs
- Stock available in special jacket colors (plenum) or the standard red jacket


VITALink® 2 Hour Fire Rated (300V):

- 2 Conductor, 18-12 AWG, CI/CIC Shielded & Unshielded
- 1-4 Pairs, 14 AWG, CCW Armored
- 2-4 Pairs, 18 AWG, Shielded & Unshielded Ethernet

VITALink® 2 Hour Fire Rated (600V):

- Single & Multiconductors, 14 AWG-750 kcmil
- CCW Copper Armor
- Type MC/RC90

Sound, Security, & Access Control

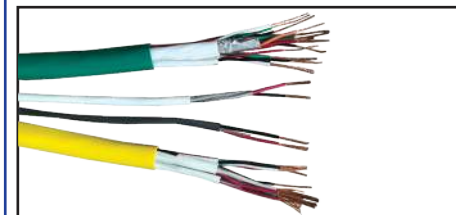

Multiconductor Sound & Security:

- 2-10 Conductors
- 22-12 AWG Stranded Copper
- CL3P & CL3R
- Shielded & Unshielded Designs

4 Element Access Control Composite:

- 4C 18 AWG: Locking power
- 3 Pair 22 AWG Shielded: Card reader
- 2C 22 AWG: Door contact
- 4C 22 AWG: Request for exit or retina scanner
- Plenum & Riser